



Calibration
certificate

Thermocouple thermometers

TK 100 - TK 150
TK 102 - TK 152

New



Functions


- Temperature
- Selection of units
- HOLD function
- Simplified mode function
- Minimum and maximum values
- Adjustable automatic shut-off
- Adjustable backlight
- Delta T (TK 102 & TK 152)
- Adjustable alarms (TK 150 & TK 152)
- Auto-Hold function (TK 150 & TK 152)

Technical features


Measuring elements.....	Thermocouple K, J or T class 1
Display.....	2 lines, LCD technology. Sizes 50 x 34.9 mm. 1 line of 5 digits with 7 segments (value) 1 line of 5 digits with 16 segments (unit)
Housing.....	Shock-proof made of ABS, IP54 protection or IP65 with food industry protective cover
Keypad.....	Metal-coated with 5 keys
Conformity.....	electromagnetical compatibility (NF EN 61326-1 guideline)
Power supply.....	1 alkaline battery 9V 6LR61
Operating temperature.....	from 0 to 50°C
Storage temperature.....	from -20 to +80°C
Auto shut-off.....	adjustable from 0 to 120 min
Weight.....	190g
Languages.....	French, english




TK 100 - 1 channel




TK 102 - 2 channels



TK 150 - 1 channel



TK 152 - 2 channels



*except class 100S and 150S

Specifications


	Measuring units	Measuring ranges	Accuracy*	Resolutions
THERMOCOUPLE PROBES (see related datasheet)				
Thermocouple K	°C, °F	from -200 to 1300°C	±1.1°C or ±0.4% of reading**	0.1 °C
Thermocouple J	°C, °F	from -100 to 750°C	±0.8°C or ±0.4% of reading**	0.1 °C
Thermocouple T	°C, °F	from -200 to 400°C	±0.5°C or ±0.4% of reading**	0.1 °C

*All accuracies indicated in this document were stated in laboratory conditions and can be guaranteed for measurements carried out in the same conditions, or carried out with required compensation.
**the accuracy is expressed either by a deviation in °C, or by a percentage of the value concerned. Only the bigger value is considered.

Working principle


According to the Seebeck effect, when two wires composed of different metals are joined at both ends, an electric circuit is formed. The voltage increases with temperature.

I.E : Thermocouple K




Dimensions


• Top view



• Front view

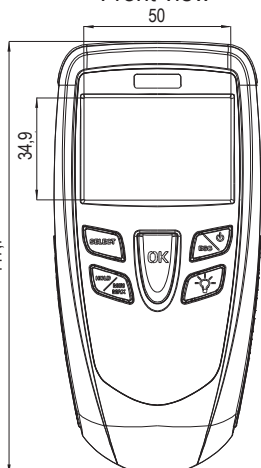

• Side view



Supplied with ...

● Included ○ Optional

DESCRIPTION	TK 100	TK 102	TK 150	TK 152
Thermocouple probes	○	○	○	○
Protective cover for food industry IP65			○	○
Calibration certificate*	●	●	●	●
Transport case	●	●	●	●



Large choice of temperature probes

(See related datasheet) :

- ambient
- contact
- penetration
- food industry penetration
- general use
- Etc...

*except class 100S and 150S



Accessories (See related datasheet)

CE 100	BN (See related datasheet)
Protective cover with magnet and holding system.	Black ball Ø 150mm with junction for temperature probe Ø 4,5mm. Further dimensions available.
RTS	GST
Telescopic extension (for probe), 1m long and bent at 90°.	Silicone heat-conductive grease for temperature probes

Warranty period

Instruments have 1-year guarantee for any manufacturing defect (return to our After-Sales Service required for appraisal).

www.kimo.fr

EXPORT DEPARTMENT

Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29

e-mail : export@kimo.fr



Distributed by :

PRC Technologies Corp., Ltd.

Tel : 02 530 1714, 02 530 1619, 02 530 1621

Fax : 02 530 1731

info@prctechth.com www.prctechth.com